


## RF to STL Translator

Ideal for public statewide networks and private Cloud-based environments, this compact programmable receiver converts ATSC 3.0 RF signals to STLTP streams, with Secure Reliable Transport (SRT) output options. It's also useful for business channels using SRT protocol, signal capturing for manufacturing, signal monitoring for automobiles and remote areas, ATSC 3.0 retransmission, changing channel numbers for local broadcast stations, and more.

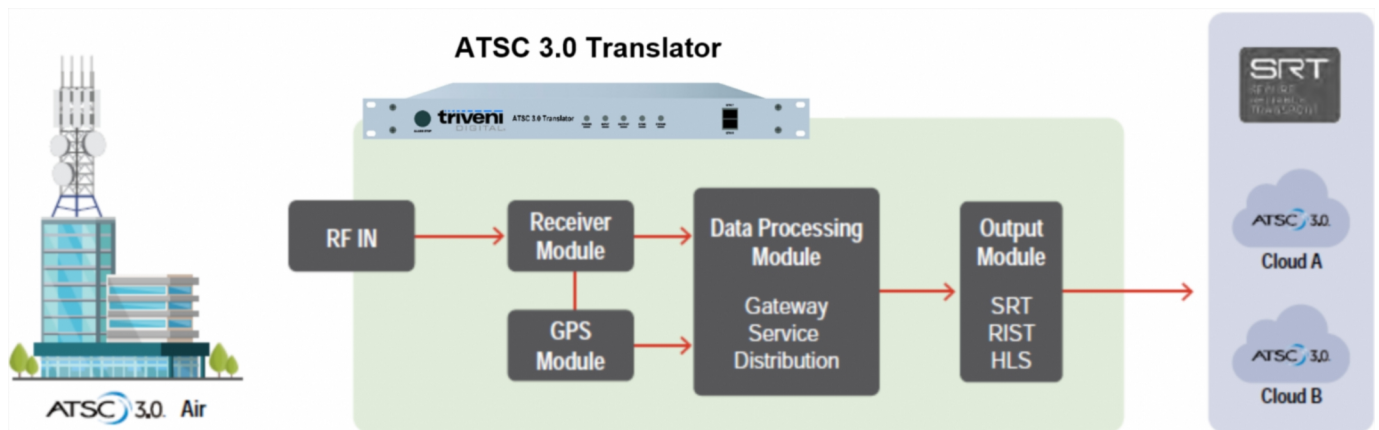

The ATSC 3.0 Translator makes it easy to convert, repeat, monitor, and troubleshoot ATSC 3.0 services, with SRT outputs.

### BENEFITS

- Converts the entire ATSC 3.0 broadcast chain for statewide networks and broadcast repeaters
- Provides controllable, low-latency transmission of ATSC 3.0 services via the SRT protocol
- Validates ATSC 3.0 signals in real time down to the frame structure
- Supports multiple Physical Layer Pipes (PLPs)
- Performs ATSC 3.0 network troubleshooting
- Allows editing of channel numbers and names
- Helps postmortem analysis with log and trend files
- Enables ATSC 3.0 R&D road tests and field coverage
- Delivers effective, cost-efficient, and easy-to-use operations and maintenance
- Includes expert U.S.-based customer support

### FEATURES

- Studio-to-Transmitter Link Transport Protocol (STLTP) output rebuilding
- SRT transmission for ATSC 3.0 RF services
- Channel Impulse Response (CIR) with TXID
- ATSC 3.0 frame analysis
- SNR and bitrate monitoring for each service
- Internal GPS/GLONASS receiver
- RF reception qualification
- Headend/TX site and off-air measurements
- Dual hot-swappable power supply
- Easy-to-use web-based GUI
- Google®-compliant report files with RF and GPS measurements

[Get a free demo or price quote](#)



Triveni Digital  
777 Alexander Road | Suite 101  
Princeton, NJ 08540  
t: 609.716.3535 | f: 609.716.3503  
TriveniDigital.com